


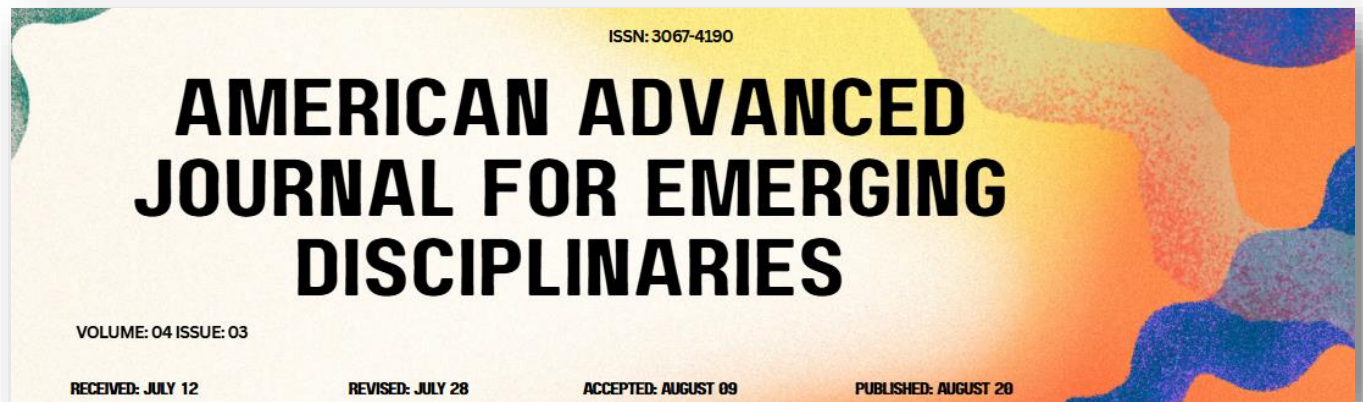

Streaming EHR Intelligence for Precision Medicine

Dasari Vinay

Independent Researcher

vinaydasarikonda@gmail.com

Abstract

Medicine is increasingly moving toward a personalized approach, with the goal of delivering the right treatment to the right patient at the right time. In critical care settings such as the intensive care unit and the emergency department, timely assessment of mortality risk or the need for curative-intent therapy is central to clinical decision-making. This goal is supported by the passive surveillance of patients who are continuously monitored and routinely tested. Translational efforts in this space combine clinical data engineering with machine-learning methods to build real-time systems capable of detecting patient deterioration and informing clinical decisions. The growing availability of data stored in electronic health record systems has fueled strong interest in automated patient management, with the potential to augment clinical judgment or, in some cases, trigger risk-averse intervention automatically.


To realize this potential, decision-support systems must be developed and validated to reliably and rapidly estimate a patient's risk of various outcomes over the course of a hospital admission. Carefully designed stopping criteria determine when such a system should issue a confident prediction versus remain in a "wait and see" state. These criteria evaluate not just predictive accuracy but also the validity of a committed prediction over time. Consistency analysis plays a key role here, ensuring that predictions align with expected clinical behavior — they should not flip or drift unpredictably, and most patients should not remain indefinitely in an active waiting state.

Keywords : Electronic Health Record (EHR) Analytics, Precision Medicine, AI-Driven Clinical Data Engineering, Deep Healthcare Architectures, Real-Time Healthcare Analytics, Clinical Decision Support Systems (CDSS), Healthcare Big Data Integration, Predictive Healthcare Modeling, Machine Learning in Healthcare, Intelligent Clinical Data Management.


1. Introduction

Medicine is gradually shifting from a one-size-fits-all approach to a precision paradigm tailored to individual patients; this transition requires accurate models, validated decision-making processes, and supportive systems. Such precision is particularly critical for evolving and time-sensitive situations, such as healthcare monitoring, diagnosis, prognosis, treatment planning, and therapy selection for chronic diseases. Timely, data-driven support can greatly enhance decision making and patient outcomes, as evidenced by the successful application of real-time analytics in other

fields. Real-time clinical decision-support systems, with low latency, high data exchange timeliness, uncertainty quantification, and risk stratification, would be greatly beneficial in many medical areas, including personalized clinical treatment, patient surgical procedure planning, prediction of clinical treatment effect, and real-time many-task adaptation and pre-operative/operative indication identification.

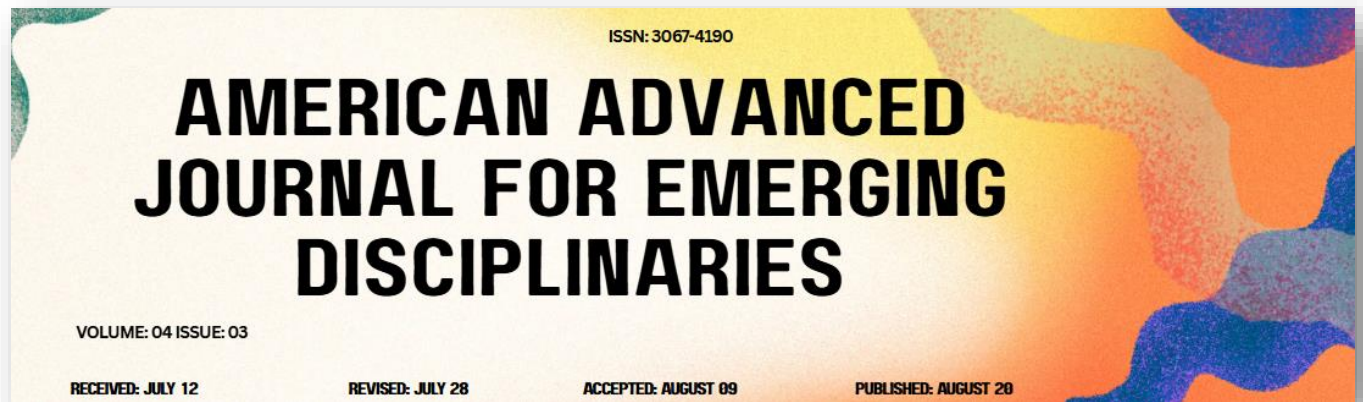

Real-time clinical analytics use CLIs as a driving force for change, yet no comprehensive end-to-end architecture for timely support has been presented. The lack of accepted architectures arises from the need for longitudinal streaming data and real-time prediction of clinical models. TyML principles help overcome the challenge using edge-cloud hybrid systems, an extension of the Medicity model for real-time analytics. Data engineering is foundational to timely healthcare analytics, as performance depends on data quality, processing. Are suitable and relevant to the clinical problem at hand. Data integration, governance, quality management, and transformation into analytical components that are finally converted into intelligent clinical systems are thus necessary.

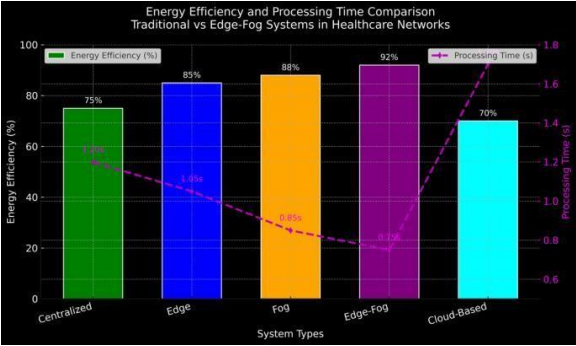


2. Background and Theoretical Foundations

Relevant theories of clinical data engineering, characteristics of EHR data, interoperability support, and decision-support theory provide the foundation for real-time analytics. A review of previous work contextualizes the discussion of causality, uncertainty, and risk stratification in clinical scenarios.

Component	Function	Technologies/Met hods	Clinical Benefit
Data Ingestion Layer	Collects real-time EHR streams	HL7 V2, FHIR, Apache NiFi	Continuous patient monitoring
Data Transformat ion Layer	Cleans and standardize s data	ETL Pipelines, Semantic Mapping	Improved data quality
Interoperabil ity Engine	Integrates heterogene ous systems	SNOMED, LOINC, NIEM	Unified healthcare records
AI Analytics Engine	Generates predictive insights	Deep Learning, Online Learning	Early disease detection
Decision Support Layer	Supports clinicians in real time	CDSS, Risk Stratification	Faster clinical decisions
Edge-Cloud Hybrid Layer	Enables low-latency analytics	Edge AI, Cloud Computing	Real-time responsiven ess

Table 1. Core Components of AI-Driven Clinical Data Engineering Architecture

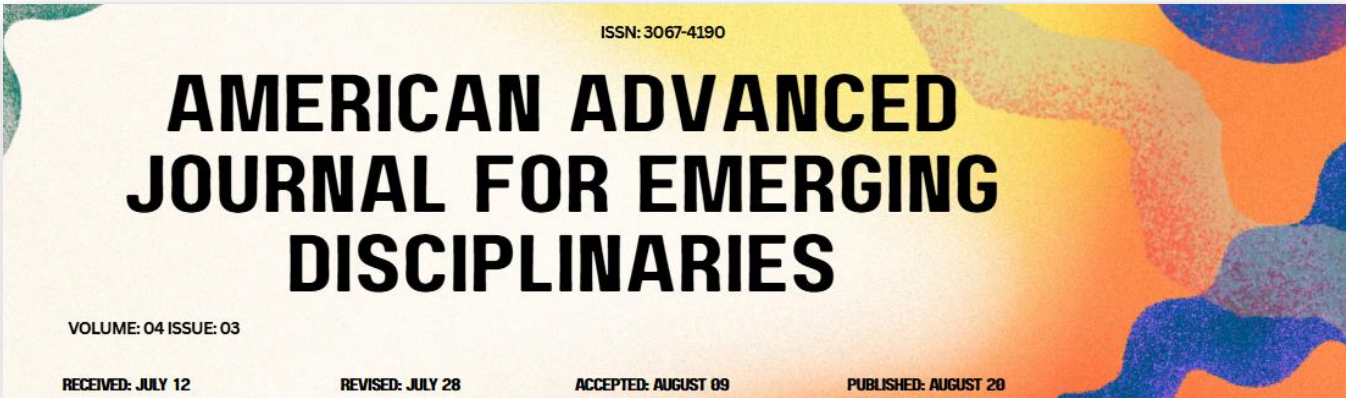

2.1. Precision Medicine and Real-Time Decision Support

Analytics products based on conventional analytical paradigms, such as retrospective models or dashboards, are often referred to as the future. Unfortunately, for at-risk patients and time-sensitive problems, a more appropriate term is “delayed.” Nevertheless, by using real-time data NLP-XL-R and machine-learning models with low latency, timely, interpretable, quality-checked predictions can be provided, thereby enabling a broad spectrum of analytic services. With respect to causality, patients receiving a new treatment are monitored in a similar way to patients administered a new, constrained treatment. Although the second group is not randomized A/B testing, and inferring causality remains a challenge, the direction of change in risk can be interpreted as treatment effect indication. Uncertainty and risk quantification represent two of the most common pitfalls in clinical analytics. Uncalibrated or poorly calibrated models lead to inadequate alert prioritization, incorrect resource allocation, or wasted efforts in patient follow-up. Rubin Causal Markov Condition and Causal-Marking Base classifiers are scientific concepts proposed to detect bad worlds. When clinical presentation reflects a predeath state, the observations need only to survive causality checks.

Predictive Modeling	Time-series healthcare data	Deep neural networks	Risk predictions
Clinical Inference	AI-generated insights	Decision support logic	Treatment recommendations
Monitoring & Feedback	Outcome data	Drift detection	Model adaptation

Table 2. Real-Time EHR Analytics Pipeline

Pipeline Stage	Input Data	Processing Method	Output
EHR Data Collection	Clinical records, vitals	Streaming ingestion	Raw patient streams
Data Validation	Structured/unstructured data	Data quality checks	Trusted datasets
Feature Engineering	Patient risk factors	ML preprocessing	Predictive variables

AMERICAN ADVANCED JOURNAL FOR EMERGING DISCIPLINARIES


VOLUME: 04 ISSUE: 03

RECEIVED: JULY 12

REVISED: JULY 28

ACCEPTED: AUGUST 09

PUBLISHED: AUGUST 20

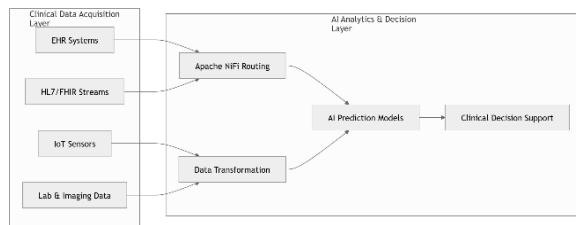

Real-Time EHR Analytics Pipeline

2.1. Precision Medicine and Real-Time Decision Support

Therapeutic and preventive strategies tailored to each individual are essential for enhancing patient outcomes and quality of life. Thus, the concept of precision medicine aims to deliver the right intervention to the right patient at the right time. However, timely access to the required intervention remains elusive for many. Precision medicine does not apply only to therapeutics; it also encompasses preventive decision support. Providing timely decision support for preventive treatment, when early warning signs may not be obvious, requires different research considerations compared to therapeutic decisions. Patients and physicians do not often think about the required intervention until a specific event is in the near future: for cardiac disease, probably within the next year; for stroke, maybe within the next week or month; for sepsis, within a few hours; for admission on an on-going outbreak, within a few days. Indeed, for patients already hospitalized, providing a real-time decision support system is crucial for guiding correct management decisions. Hence, real-time decision support for precision medicine seeks to predict the required intervention in the near future, supporting patients and medical professionals in addressing the appropriate warning signs. Current systems focus predominantly on therapeutic interventions but generally neglect on preventive strategies.

Real-time inference remains an underexplored area in the precision medicine space. Nevertheless, providing timely inference that serves as a trigger for action changes the dynamic of the problem. Timelines shorten, the requirement


for frequent updates increases, and causality, uncertainty, and risk become central considerations. Most real-time predictive modeling systems in the literature address therapeutic interventions; the focus here lies predominantly on preventive decision support in anticipation of natural events. Innovation typically occurs at the edges of the healthcare system; for instance, supply chain companies advancing fast access to vaccines. These industry players often engage with hospitals to assess demand for products and services on the short end of the operations planning horizon. The need for real-time planning transcends products, extending to management on the healthcare provider side. Early warning for admittance to


a hospital or preventive treatment on the near horizon alerts both patients and medical providers: the underlying requirements of timely information that fuels operations on the product side is not dissimilar to what exists on the offer side of the healthcare system.

3. Data Engineering for Real-Time EHR Analytics

Real-time analytics require data stewards to proactively detect and resolve data problems using a variety of resources, including data governance, tools for data quality, and a system for data transformation. Traditional decision-support systems for healthcare are seldom reliable because of long model lifecycles and the complicated interactions between clinical variables and outcomes, yet health records typically contain the full-time history of a wide variety of clinical factors. The challenge therefore is not to engineer a full-scope model but to engineer the data passage in such a way that any combination of risk factors is valid for high-quality inference.

Data from electronic health records (EHR) is typically ingested in batches, yet ongoing analytics need data in a timely way. Hence, ingestion pipelines use a streaming model for real-time environments. Health records generally follow the HL7 V2 message format, which uses a communication protocol to define presentation segments, orders, and events between health systems. A tailored HLS Data Stream Messaging system was developed with provisional use of the traditional HL7 V2 specification for early simulation. The full HLS Data Stream Messaging design remains on the roadmap, responding to a high-level abstraction called HL Messaging in HL7 Fast Health Interoperability Resources (FHIR).

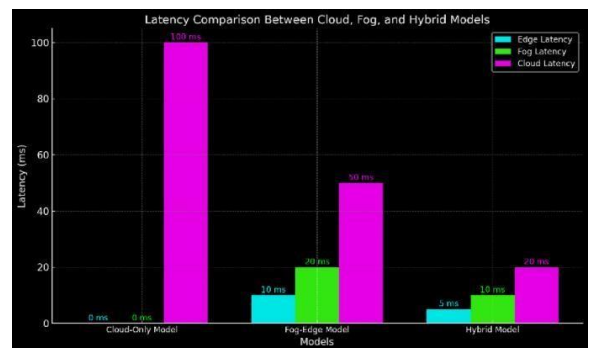

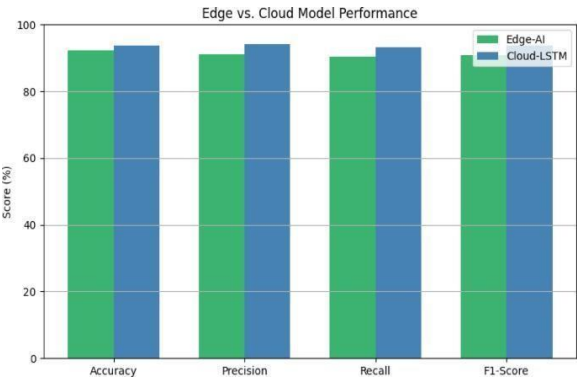

Mathematical Formulas:

1. Real-Time Clinical Risk Prediction

$$R_t = P(Y = 1 | X_t)$$

Where:

R_t = predicted patient risk at time t
 X_t = real-time EHR feature vector

2. EHR Streaming Data Velocity

$$V_d = \frac{N_e}{T}$$

Where:

V_d = data ingestion velocity
 N_e = number of EHR events
 T = processing time

3. Clinical Decision Support Accuracy

$$A = \frac{TP + TN}{TP + TN + FP + FN}$$

T_o = output response time
 T_i = input arrival time

5. Predictive Survival Probability

$$S(t) = e^{-\lambda t}$$

Where:

$S(t)$ = survival probability
 λ = hazard rate
 t = time duration

6. Model Calibration Error

$$CE = \frac{1}{n} \sum_{i=1}^n (p_i - y_i)^2$$

Where:

p_i = predicted probability
 y_i = observed outcome

7. Healthcare Data Quality Score

$$Q_d = \frac{C+V+I}{3}$$

Where:

C = completeness
 V = validity
 I = integrity

8. Edge-Cloud Processing Efficiency

$$E_p = \frac{D_p}{B_u}$$

Where:

TP = true positives
 TN = true negatives
 FP = false positives
 FN = false negatives

4. Inference Latency Model

$$L = T_o - T_i$$

Where:

L = inference latency

Where:


E_p = processing efficiency
 D_p = processed data
 B_u = bandwidth usage

9. Real-Time Throughput Metric

$$T_h = \frac{N_r}{t}$$

Where:

T_h = throughput

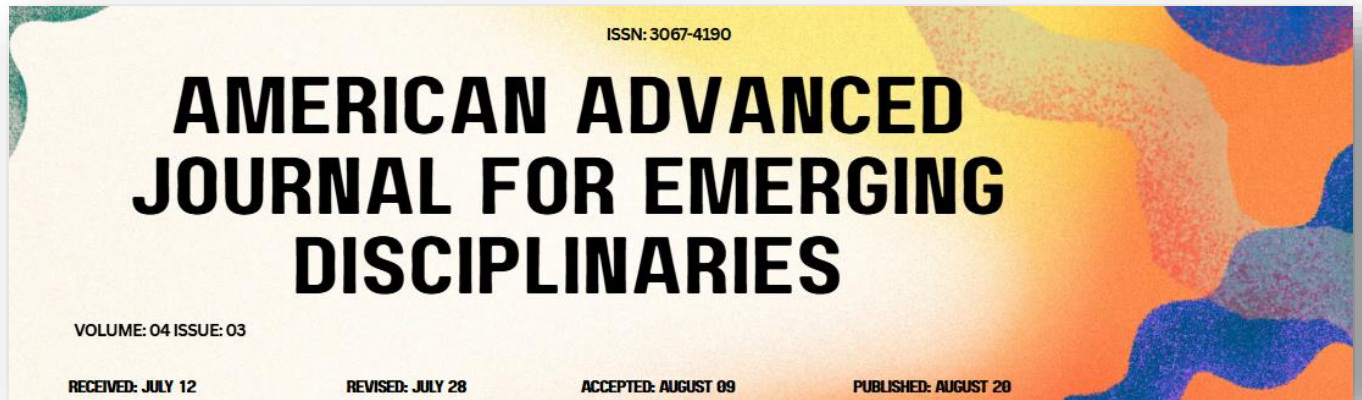

N_r = number of requests processed
 t = execution time

10. AI-Based Precision Medicine Utility

$$U_p = \alpha A + \beta T + \gamma S$$

Where:

A = accuracy
 T = timeliness
 S = survivability
 α, β, γ = weighting coefficients


NiFi flow routes the data according to the sitemap and passes plaintext or XML data to a Llamacast connection. An Elasticsearch cluster stores the data and index, enables future searching, feeds a Kibana dashboard, and forwards events to an Azure Logic App. NIEM supplies the final semantic integration layer.

3.1. Data Ingestion and Interoperability

Open systems based on Internet protocols are crucial for eHealth, yet in practice, medical data sources often follow proprietary syntaxes, ontologies, and data models. The challenge lies in integrating disparate data sources and data streams so as to give the utmost benefit to a real-time decision-support system. A reliable solution shields the consumer from the complexities. A parse library and a sitemap definition sit at the ingestion endpoint. The parse library handles local files, database connections, secured web scrapping, and streaming input. Each new source that conforms to a sitemap opens an input channel.

Sitemaps follow an arcs-and-nodes definition. The arcs abstract the real-time transport mechanism and the nodes define the exploitable data structure. Data arriving in standard form that fits the definition feed directly into an information model. Early mapping to SNOMED or LOINC formalizes the local semantics, prevents drift, and enforces structure. Mapping onto clinically-relevant aspects of the shared model facilitates clinical join with low overhead.

Schemas evolve dynamically based on the least-dynamic stream of the set. Pulling the most stable structure from a map index eases future mapping and joins. Open-source SIEM solutions provide the surrounding infrastructure. An Apache

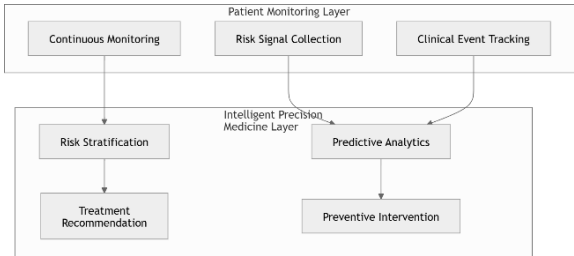

Precision Medicine Decision Framework


AI Technique	Purpose	Healthcare Application	Advantage
Deep Learning	Pattern extraction	Disease diagnosis	High predictive accuracy
Online Learning	Continuous adaptation	ICU monitoring	Real-time model updates
Survival Models	Temporal risk prediction	Mortality estimation	Prognostic assessment
Ensemble Learning	Multi-model inference	Chronic disease prediction	Improved robustness
Drift Detection	Detects distribution changes	Population health analytics	Sustained reliability
Explainable AI	Transparent predictions	Clinical diagnostics	Increased clinician trust

Table 3. AI Techniques for Precision Medicine

4. AI Methods for Real-Time Clinical Analytics

Algorithms and workflows are described. dependence on clinical data streams and the need for timely, incremental inference, adaptation, and decision support through clinical analytics for EHR data are emphasized. Methods accomplishing these objectives in formally defined real-time settings are covered.

Specific methods are presented for time-sensitive modeling applications in which clinical analytics deliver timely, low-latency predictions for indications such as disease onset, disease-course progression, and survival likelihood estimation. Novelty hinges on the ability to produce timely,

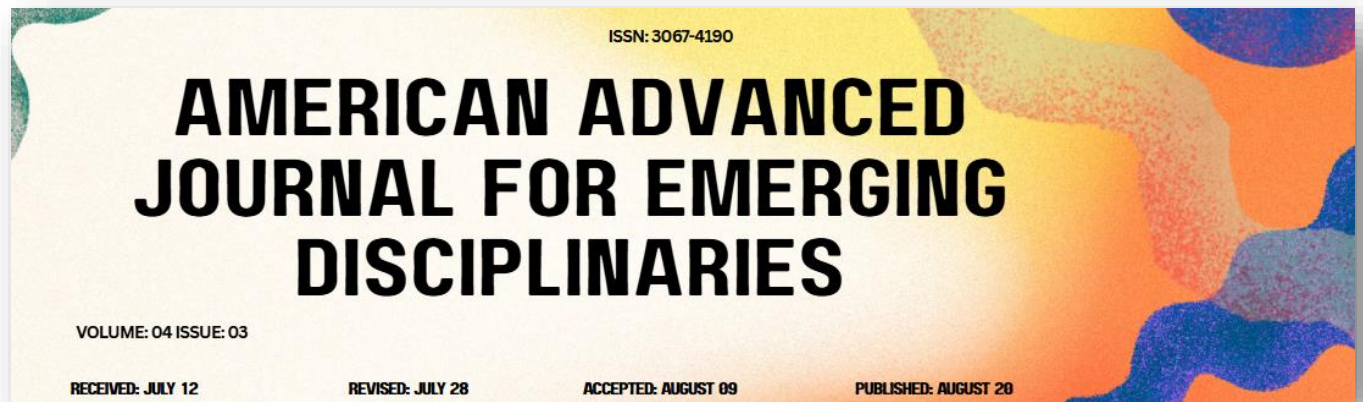


yet reliable, inferences from such time-sensitive modeling tasks. With clinical inferences predominantly derived from batch-processing paradigms, the reliability of predictions from time-sensitive models operating under formal real-time constraints remains less established in clinical literature. Research contributions therefore extend beyond algorithmic engineering; the associated evaluation methodology and set of real-time metrics for assessing model accuracy—explicitly accounting for the temporal aspects of clinical inference—also represent important advancements in this area.


Time-sensitive modeling techniques featuring algorithmic engineering, design decisions, and evaluation mechanisms suited for the time-sensitive setting are discussed. Consideration of concepts such as online-learning formalism and drift detection are complemented with discussion of novel low-latency inference algorithms supporting online time-sensitive models in deployed settings. Research topics addressing validation procedures for time-sensitive inference tasks and development of model portfolios in which the predictive signals support real-time validation processes are highlighted. Detailed also are measures of reliability suited for time-sensitive clinical inferences, particularly calibration and the richer notions of timeliness, survivability, and safety that capture the clinical stakes involved in timely prediction tasks.

Key AI methods supporting precision medicine in real-time encompass online learning for smooth adaptation, drift detection to identify shifts in data distributions, validation procedures tailored for low-latency contexts, and techniques promoting robustness to missing values or noise in key variables. An approach to offline learning that approximates the speed of online schemes is also presented, as well as an ensemble-based method for adaptation.


While a variety of classification and regression algorithms support time-sensitive applications, other types of models

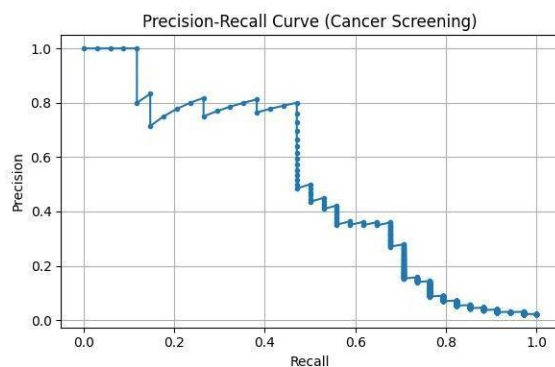

4.1. Time-Sensitive Modeling Techniques

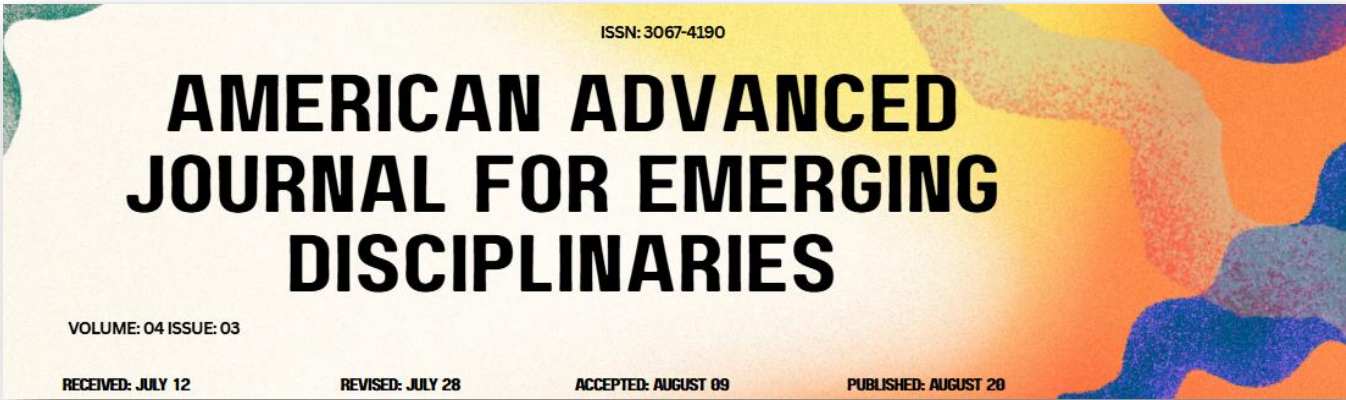

also play important roles. In particular, survival models are key to quantifying temporal risk in clinical settings. Their real-time use in precision medicine requires special consideration with respect to model establishment. Different time-sensitive problems apply depending on whether ensemble solutions or single models are employed. In the first case, multiple models are trained on distinct regions of the time-varying distribution, while in the latter case, a single model is continuously adapted to the evolving distribution. Marker pathways are particularly relevant for prognostic prediction, since endpoint labels are fixed for given individuals. The associated latent survival models therefore necessitate assessment of calibration (how well predicted continuities agree with actual outcomes), timeliness (how soon before the endpoint a prediction can be made), and survival of individuals with low predicted risk (which seeks reassurance that those deemed relatively safe actually go on to survive).

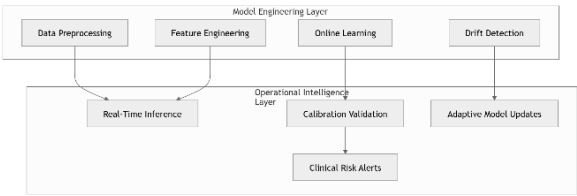


AI Model Lifecycle for Clinical Analytics

5. System Architecture for Real-Time Precision Medicine

Deployment Layer	Responsibilities	Advantages	Challenges
Edge Devices	Local sensing and inference	Low latency	Limited computation
Cloud Infrastructure	Large-scale analytics	Scalability	Network dependency
Hybrid Systems	Distributed intelligence	Balanced performance	Complex orchestration
Mobile Health Nodes	Remote patient monitoring	Accessibility	Security concerns
AI Coordination Layer	Event synchronization	Real-time alerts	Data consistency


Table 4. Edge-Cloud Hybrid Deployment Characteristics

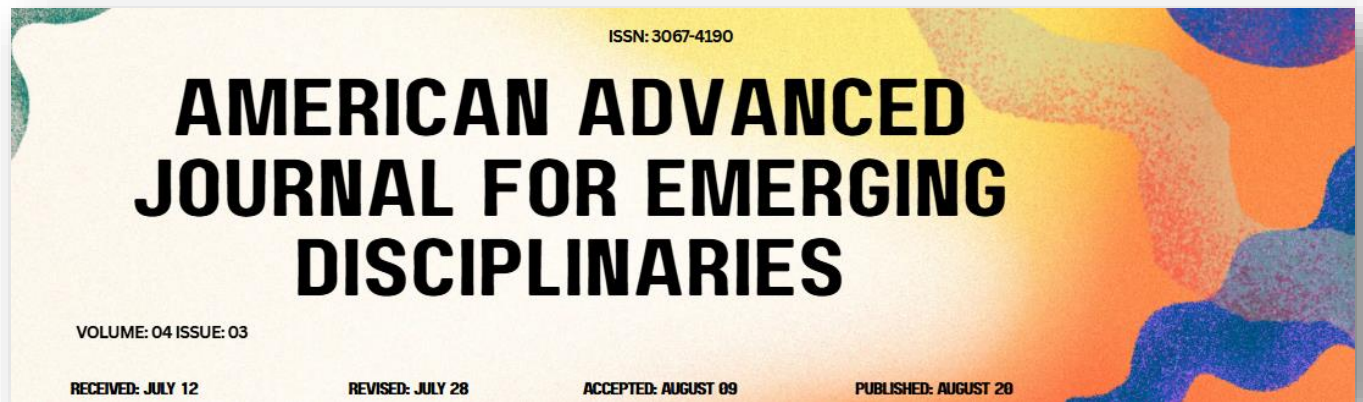

An end-to-end architecture enables timely clinical analytics throughout decision support life cycles. It includes a scrubbed raw data layer for all EHR records, a clean data layer supporting generic online analytics, and a deployed Daily Decision Support for Data-Driven AI-Driven Decision Support. A collection of services (anonymization and de-identification, data governance, quality assurance, machine learning, and mining) directly connected to the raw layer provide periodic insights for internal validation and for decision support, methods, and plug-ins requiring longer processing cycles.


The architecture spans from an edge device collecting, grooming, context-adding, and transforming audio for input via natural language processing through a pipeline to non-EHR sources, such as streaming weather data and face recognition for mobile users. Coordination and corroboration of mobile, on-site, and other modalities support outbound multichannel detection of abnormal health conditions and triggers for at-risk populations. Most deployment patterns align with high-bandwidth and low-latency edges. The cloud serves late-triggering and aggregation systems, where it addresses additional privacy and bandwidth deficiencies and weakens real-time requirements. Cyber-risk tolerance significantly influences hybridization patterns.

devices such as cameras, microphones, and motion sensors are physically closer to their associated events, thus requiring shorter reaction times and less internet bandwidth. Edge devices can automatically react to detected events—emitting warnings, triggering alarms, or turning off leaks. Video and sound analysis often can be performed on the device, as only abnormal events need to be sent across the network for further analysis. Therefore, camera networks often include the ability to discern a potential danger such as a fire, heat detection, or smoke. Compressing this event along with supporting video frames optimises transcoding time and reduces network impact. These use cases balance the investment in

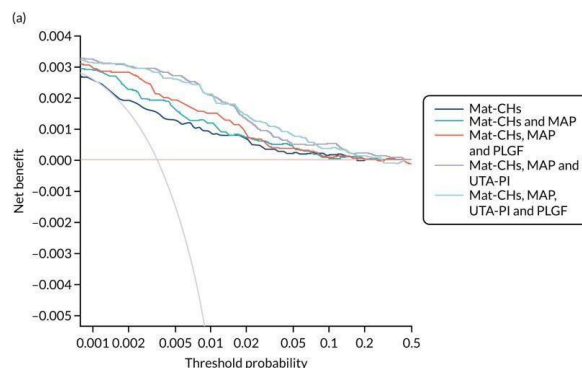

5.1. Edge and Cloud Hybrid Deployments

For time-sensitive applications, latency is paramount. Edge

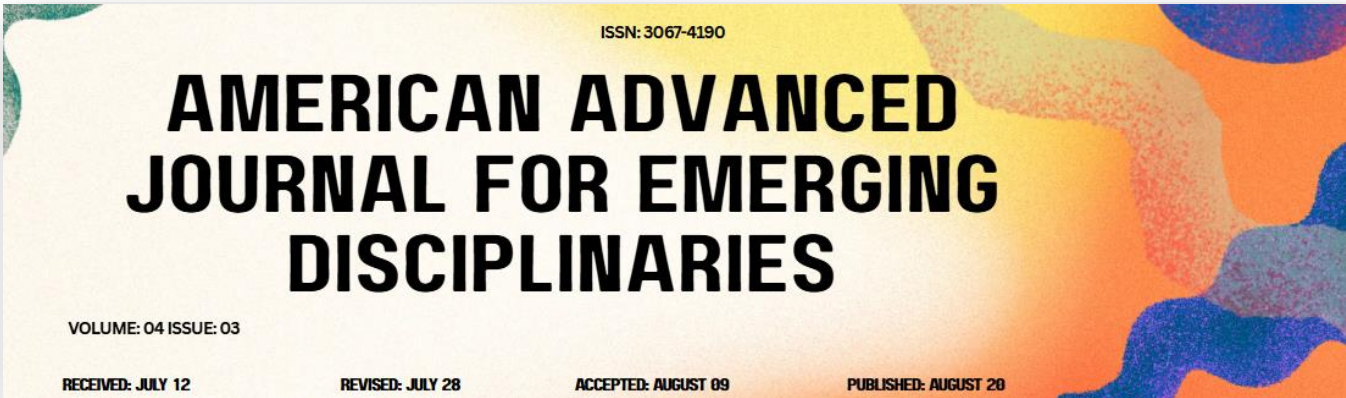


decentralised architecture with the economic and architectural complexities, bonded by tight expectations of reaction time.

Other decision-support applications require careful consideration of information lifecycle latency. At one extreme are recommendations for the immediate future, such as emergency detection, diagnosis, and triage models. Some warnings need to be seen by first responders within minutes or seconds; the decisions should be straightforward and crowned with only the best signals to avoid potentially unsafe actions. Performance requirements also apply during the maintenance of the monitoring toolset, including the risk-drift detection and dynamic calibration processes. Periodically redistributing a predictive health state classifier based on recent events and focused on future survivability of all users' safe status is meant to avoid model/technique degradation for temporally repetitive and long-lasting events, for example flooding during monsoons in India. Other applications address the middle-term horizon, where managing resource allocation and risk assessment systems requires more data and the ready examination of several solutions to minimize downtime.

Calibration	Agreement between prediction and outcome	Reduces false alarms
Timeliness	Prediction before adverse event	Enables preventive action
Survivability Metric	Survival consistency validation	Enhances trustworthiness

Table 5. Evaluation Metrics for Real-Time Clinical AI Systems

Metric	Description	Clinical Importance
Latency	Time required for inference	Critical for emergency response
Throughput	Frequency of generated predictions	Supports continuous monitoring
Accuracy	Correctness of predictions	Ensures safe interventions
AUROC	Signal-versus-noise discrimination	Improves diagnostic reliability

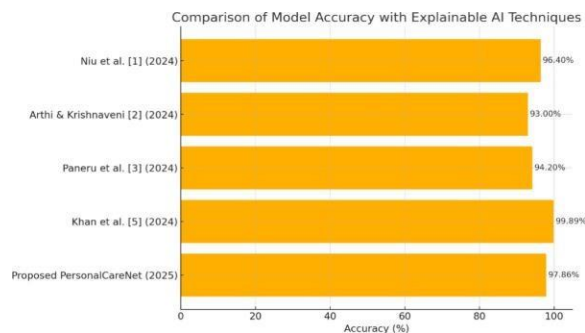


Healthcare Data Governance and Security

6.1. Metrics for Timely and Accurate Inference

6. Evaluation Frameworks and Validation

Approaches for evaluation, validation, and performance assessment provide insights into quality attributes and support recommendations for practical deployment. Methodologies exist for assessing the functioning of predictive models and risk stratification methods under conventional latency constraints; that is, those that impose no requirement on the maximum time taken to complete the analysis. For models operating under real-time conditions—whereby the information needed for analysis arrives in a continuous stream, the model is exposed to a sequence of analysis requests, and the analysis results should be returned as soon as possible—the situation is more complex.

Timely inference—defined as satisfying a pre-defined upper limit on the time required for inference to be made—becomes a central quality attribute, both for the inference itself and in the context of assisting clinical decision making in time-sensitive situations. The throughput of the method can also become consequential, since the information to be modeled arrives in a continuous stream. The obvious metric for assessing risk stratification under real-time conditions is whether the predictions made for individuals fell into the predicted terminal classes (e.g., survival / death) at the time at which the predictions would be available, although more graceful measures also exist.

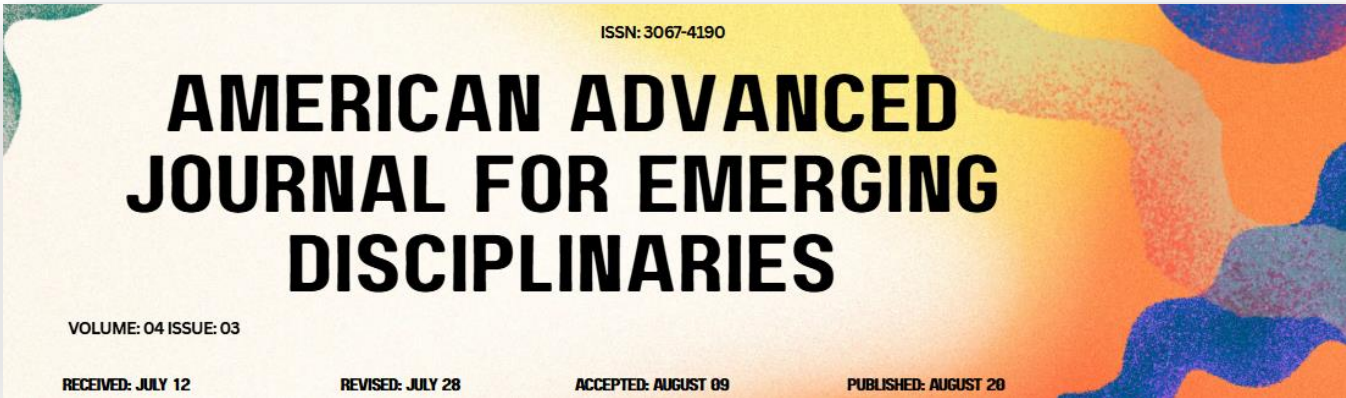

Evaluation Frameworks and Validation: establish rigorous methods to assess performance, reliability, and clinical impact under real-time constraints.

Designing machine learning models to formally reason on the relationships between real-time data, decision-making, and patient outcomes presents a unique challenge for clinical artificial intelligence. An appropriate research strategy mandates thorough examination of properties like performance, reliability, and clinical impact, with a particular eye toward ensuring satisfactory behavior when deployed in practice across real-time settings. Consequently, the performance of each algorithm must be carefully evaluated in conjunction with the anticipated endpoints.

The overarching goal is to maintain foresight on event occurrence and facilitate timely intervention. With that in mind, the following aspects must be considered: Latency — the time to produce an output following new input; Throughput — the frequency with which decisions can be generated; and Accuracy — the proportion of outputs among all instances of a certain decision. Given the general motivation around predictive predictive modeling, additional criteria could include the area under the receiver operating characteristic curve (AUROC) when distinguishing signal from noise and the calibration of predictions. Surviving the test of timeliness naturally encompasses the other concepts.

Model Drift	Reduced AI accuracy	Continuous retraining
Privacy Risks	Exposure of patient data	Federated learning
Scalability Constraints	System overload	Cloud-native architectures
Explainability Issues	Clinician distrust	Explainable AI frameworks

Table 6. Challenges and Solutions in Real-Time Precision Medicine

Challenge	Impact	Proposed Solution
Data Heterogeneity	Inconsistent clinical records	Standardized interoperability
Missing Clinical Data	Reduced prediction reliability	Robust imputation methods
High Latency	Delayed interventions	Edge computing deployment

AMERICAN ADVANCED JOURNAL FOR EMERGING DISCIPLINARIES

VOLUME: 04 ISSUE: 03

RECEIVED: JULY 12

REVISED: JULY 28

ACCEPTED: AUGUST 09

PUBLISHED: AUGUST 20

7. Conclusion

Real-time clinical inference from automation-modified EHRs, such as prediction of readmissions or outcomes, presents a new and much-needed dimension of clinical decision support and is emerging as a principal and possibly game-changing application. Analytically proven convincing success in the real-time paradigm would support other real-time applications broadly and precision medicine more generally. The analytical methods, for rapid inference and claims-validating real-time decision support, additionally represent a new analytic dimension for a wider variety of decision-support prediction analyses, including patient desks and clinical framing, where dependable accuracy has potentially life-or-death implications. All indications are that timely real-time assistance would be consummately welcomed by clinicians. Addressing the models broadly, the overriding goal is to afford clinicians predictive decision support that minimizes time-of-day drive signal confusion confounding predictive accuracy. Confusion minimization will support data-based validation, scientific integrity, and operational effect.

End-to-end precision-medicine architecture enables real-time analytics for EHR renovation success and future use, linking causally headline-supported determinant triads with prescriptive data signals. The architecture accommodates the real-time constraints of widely distributed and continually observing depth-2 insiders in, for example, prospectively predicting stall-time factors of cardiac arrest and automating-tested surfactant and pneumatic-actuated-intubation interventions training. Causal true-share linking of determinant triads across all predicted-stall-time groups for prospectively-trained survival framing would equilibrate statistical survivability with effective ANN-survivorship intensity-based database confidence, assurance, and real-time requests. For greatest live-patient gain, attrition risk must be borne by surrogate-action signal alleviation rather than survival insurance.

References

1. Li, Y., Rao, S., Ayala Solares, J. R., Hassaine, A., Ramakrishnan, R., Canoy, D., Zhu, Y., Rahimi, K., & Salimi-Khorshidi, G. (2020). BEHRT: Transformer for electronic health records. *Scientific Reports*, 10, 7155.
2. Ma, L., Zhang, C., Wang, Y., Ruan, W., Wang, J., Tang, W., Ma, X., Gao, X., & Gao, J. (2020). ConCare: Personalized clinical feature embedding via capturing the healthcare context. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(1), 833–840.
3. Shah, N., Konchak, C., Chertok, D., Au, L., Kozlov, A., Ravichandran, U., et al. (2020). Clinical Analytics Prediction Engine (CAPE): Development, electronic health record integration and prospective validation of hospital mortality, 180-day mortality and 30-day readmission risk prediction models. *PLOS ONE*, 15(8), e0238065.
4. Challa, K., Challa, S. R., Pamisetty, A., Kaulwar, P. K., & Krishna Reddy Koppolu, H. (2025). Transforming Payments: The Role of AI and Big Data in Fraud Alerts, Credit Monitoring, and Secure Transactions. In *2025 IEEE International Conference on Communication Networks and Computing (CNC)* (pp. 1406–1414). IEEE. 2025 IEEE International Conference on Communication Networks and Computing (CNC).
<https://doi.org/10.1109/cnc68716.2025.11484733>

AMERICAN ADVANCED JOURNAL FOR EMERGING DISCIPLINARIES

VOLUME: 04 ISSUE: 03

RECEIVED: JULY 12

REVISED: JULY 28

ACCEPTED: AUGUST 09

PUBLISHED: AUGUST 20

5. Rasmy, L., Xiang, Y., Xie, Z., Tao, C., & Zhi, D. (2021). Med-BERT: Pretrained contextualized embeddings on large-scale structured electronic health records for disease prediction. *npj Digital Medicine*, 4, 86.
6. Vaid, A., Jaladanki, S. K., Xu, J., Teng, S., Kumar, A., Lee, S., Somani, S., Paranjpe, I., De Freitas, J. K., Wanyan, T., Johnson, K. W., Bicak, M., Klang, E., Kwon, Y. J., Costa, A., Zhao, S., Miotto, R., Charney, A. W., Böttinger, E., Fayad, Z. A., Nadkarni, G. N., Wang, F., & Glicksberg, B. S. (2021). Federated learning of electronic health records to improve mortality prediction in hospitalized patients with COVID-19: Machine learning approach. *JMIR Medical Informatics*, 9(1), e24207.
7. Dayan, I., Roth, H. R., Zhong, A., Harouni, A., Gentili, A., Govind, D., et al. (2021). Federated learning for predicting clinical outcomes in patients with COVID-19. *Nature Medicine*, 27, 1735–1743.
8. Maguluri, K. K., Chandrasekar, M., Gorshetwar, S. D., Prasanna, S., Anusuya, M., & Vallarasu, K. (2025, February). Applications and advancements of nanoparticle-based drug delivery in lung cancer treatment. In *2025 3rd International Conference on Integrated Circuits and Communication Systems (ICICACS)* (pp. 1-6). IEEE.
9. Ayaz, M., Pasha, M. F., Alzahrani, M. Y., Budiarto, R., & Stiawan, D. (2021). The Fast Health Interoperability Resources (FHIR) standard: Systematic literature review of implementations, applications, challenges and opportunities. *JMIR Medical Informatics*, 9(7), e21929.
10. Linder, J. E., Bastarache, L., & Hughey, J. J. (2021). The role of electronic health records in advancing genomic medicine. *Annual Review of Genomics and Human Genetics*, 22, 219–238.
11. Rajendran, S., Obeid, J. S., Binol, H., D'Agostino, R., Foley, K., Zhang, W., Austin, P., Brakefield, J., Gurcan, M. N., & Topaloglu, U. (2021). Cloud-based federated learning implementation across medical centers. *JCO Clinical Cancer Informatics*, 5, 1–11.
12. Ande, R., Mehta, D., Pandugula, C., Krishna AzithTejaGanti, V., & Kalisetty, S. (2025). Modeling the Som Kamla Amba sub-watershed using Artificial Neural Networks (ANN) and the SWAT tool. Available at SSRN 5341755.
13. Li, Y., Mamouei, M., Salimi-Khorshidi, G., Rao, S., Hassaine, A., Canoy, D., Lukasiewicz, T., & Rahimi, K. (2023). Hi-BEHRT: Hierarchical transformer-based model for accurate prediction of clinical events using multimodal longitudinal electronic health records. *IEEE Journal of Biomedical and Health Informatics*, 27(2), 1106–1117.
14. Sadasivuni, S., Saha, M., Bhatia, N., Banerjee, I., & Sanyal, A. (2022). Fusion of fully integrated analog machine learning classifier with electronic medical records for real-time prediction of sepsis onset. *Scientific Reports*, 12, 5711.
15. Dang, T. K., Lan, X., Weng, J., & Feng, M. (2022). Federated learning for electronic health records. *ACM Transactions on Intelligent Systems and Technology*, 13(5), Article 72.

AMERICAN ADVANCED JOURNAL FOR EMERGING DISCIPLINARIES

VOLUME: 04 ISSUE: 03


RECEIVED: JULY 12

REVISED: JULY 28

ACCEPTED: AUGUST 09

PUBLISHED: AUGUST 20

16. Yang, X., Chen, A., PourNejatian, N., Shin, H. C., Smith, K. E., Parisien, C., Compas, C., Martin, C., Flores, M. G., Zhang, Y., Magoc, T., Harle, C. A., Lipori, G., Mitchell, D. A., Hogan, W. R., Shenkman, E. A., Bian, J., & Wu, Y. (2022). GatorTron: A large clinical language model to unlock patient information from unstructured electronic health records. *npj Digital Medicine*, 5, 173.
17. Sivanand, R., Kumar, D. P., Nagabhyru, K. C., Natarajan, E. P., Pamisetty, V., & Kapila, D. (2025, September). IoT and AI for Real-Time Monitoring in Substation Automation. In 2025 International Conference on Computing and Communications (COMPUTINGCON) (pp. 1-5). IEEE.
18. Xu, R., Zhang, Y., Liu, Y., Chen, Y., & others. (2022). Deep phenotyping of Alzheimer's disease leveraging electronic medical records identifies sex-specific clinical associations. *Nature Communications*, 13, 675.
19. Johnson, A. E. W., Bulgarelli, L., Shen, L., Gayles, A., Shammout, A., Horng, S., Pollard, T. J., Hao, S., Moody, B., Gow, B., Lehman, L.-W. H., Celi, L. A., & Mark, R. G. (2023). MIMIC-IV, a freely accessible electronic health record dataset. *Scientific Data*, 10, 1.
20. Yang, Z., Mitra, A., Liu, W., Berlowitz, D., & Yu, H. (2023). TransformEHR: Transformer-based encoder-decoder generative model to enhance prediction of disease outcomes using electronic health records. *Nature Communications*, 14, 7857.
21. Wornow, M., Thapa, R., Steinberg, E., Fries, J., & Shah, N. (2023). EHRSHOT: An EHR benchmark for few-shot evaluation of foundation models. *Proceedings of Machine Learning Research*.
22. Zhang, X., Zhang, Y., Zhang, H., & others. (2023). Federated and distributed learning applications for electronic health records and structured medical data: A scoping review. *Journal of Biomedical Informatics*, 146, 104487.
23. Yang, X., Chen, A., PourNejatian, N., Shin, H. C., Smith, K. E., Parisien, C., Compas, C., Martin, C., Flores, M. G., Zhang, Y., Magoc, T., Harle, C. A., Lipori, G., Mitchell, D. A., Hogan, W. R., Shenkman, E. A., Bian, J., & Wu, Y. (2022). A large language model for electronic health records. *npj Digital Medicine*, 5, 145.
24. Kraljevic, Z., Bean, D., Shek, A., Bendayan, R., Hemingway, H., Yeung, J. A., Deng, A., Baston, A., Ross, J., Idowu, E., Teo, J. T., & Dobson, R. J. B. (2024). Foresight—A generative pretrained transformer for modelling of patient timelines using electronic health records: A retrospective modelling study. *The Lancet Digital Health*, 6(4), e281–e290.
25. Guo, L. L., Fries, J., Steinberg, E., Fleming, S. L., Morse, K., Aftandilian, C., Posada, J., Shah, N., & Sung, L. (2024). A multi-center study on the adaptability of a shared foundation model for electronic health records. *npj Digital Medicine*, 7, 171.
26. Ande, R., Pandugula, C., Mehta, D., Vankayalapati, R., Birbal, P., Verma, S., ... & Nanavati, N. (2025). Understanding climate change impacts on streamflow by using machine

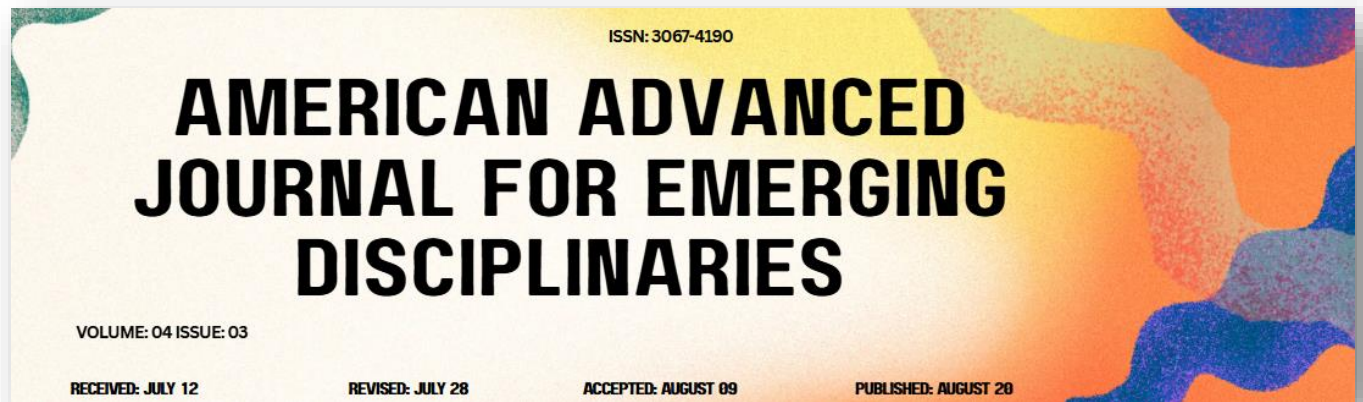

- learning: case study of Godavari Basin. *Water*, 17(8), 1171.
27. Karami, H., Atienza, D., & Ionescu, A. (2024). TEE4EHR: Transformer event encoder for better representation learning in electronic health records. *Artificial Intelligence in Medicine*, 154, 102903.
28. Allen, B. (2024). The promise of explainable AI in digital health for precision medicine: A systematic review. *Journal of Personalized Medicine*, 14(3), 277.
29. Robertson, A. J., Mallett, A. J., Stark, Z., & Sullivan, C. (2024). It is in our DNA: Bringing electronic health records and genomic data together for precision medicine. *JMIR Bioinformatics and Biotechnology*, 5, e55632.
30. Yang, Z., Liu, Y., Mitra, A., Berlowitz, D., & Yu, H. (2024). Deep learning for identifying personal and family history of suicidal thoughts and behaviors from EHRs. *npj Digital Medicine*, 7.